ENVIROFALK

Water monitor

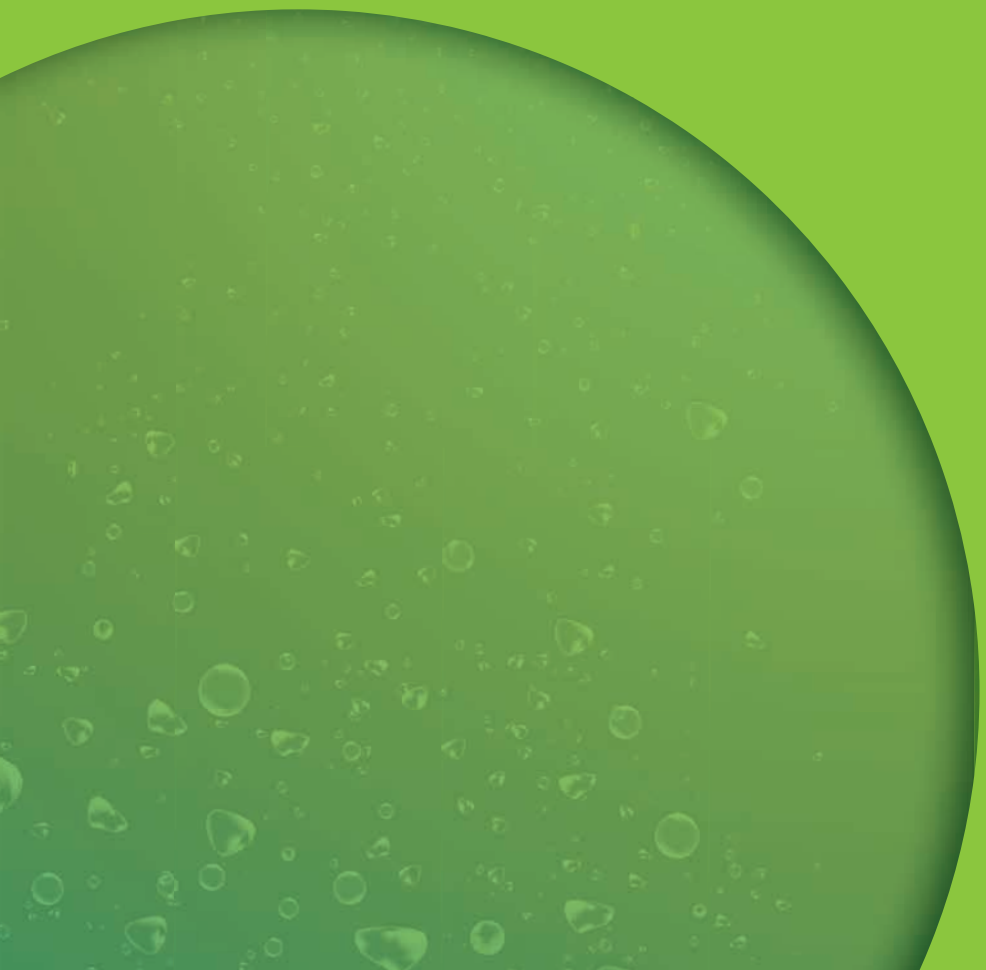

WATER PRETREATMENT

Water monitor

The complete unit for effective protection against water damage combines a control unit, solenoid valve and a sensor with 2 m of cable. With a nominal diameter of DN 10 and an R ¾“ connection, it can be flexibly integrated into existing systems.

Water monitor	For city water	For demineralised water	For demineralised water incl. signalling contact
Pressure resistant up to (bar)	10	6	6
Article no.	**528197**	**903111**	**903118**

Using water intelligently
EnviroFALK GmbH | Gutenbergstrasse 7 | 56457 Westerburg | +49 2663 9908 0 | info@envirofalk.com | **envirofalk.com**