ENVIROFALK

# System separator flange connection

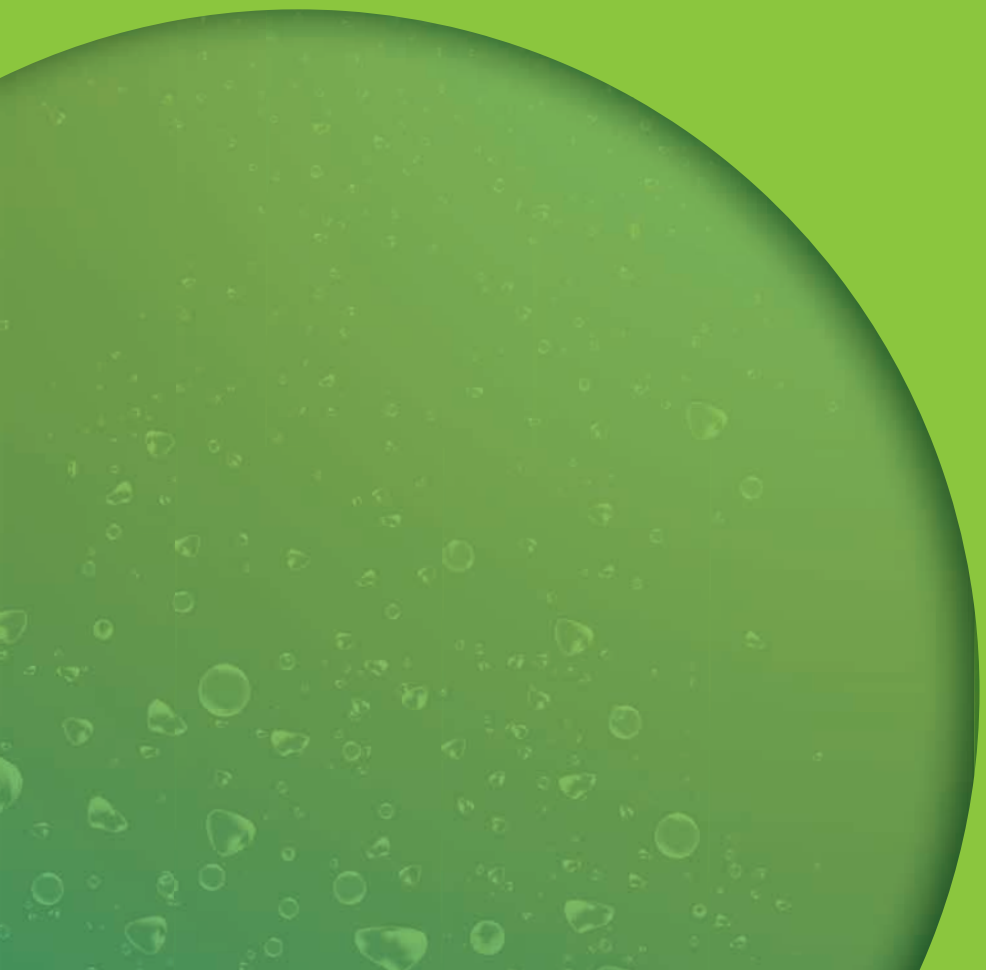

WATER PRETREATMENT

# System separator flange connection

**In accordance with DIN EN 1717 and DIN 1988, Part 4, the system separator prevents the back pressure or back suction of liquids into the municipal water supply.**

- With drain valve (brass) and three ball valves (brass)
- for connecting a differential pressure gauge
- Pressure from 1.5 to 10 bar
- Spheroidal graphite cast iron housing, powder-coated
- Maximum operating temperature of 65 °C

| System separator | DN 65 | DN 80 | DN 80 |
|---|---|---|---|
| **Flow rate** ($m^3/h$ at $\Delta p = 0{,}9$ bar) | 36 | 54 | 108 |
| **Article no.** | **734113** | **736244** | **739960** |



**Using water intelligently**
EnviroFALK GmbH | Gutenbergstrasse 7 | 56457 Westerburg | +49 2663 9908 0 | info@envirofalk.com | **envirofalk.com**