ENVIROFALK

# Fine filter, backwashable

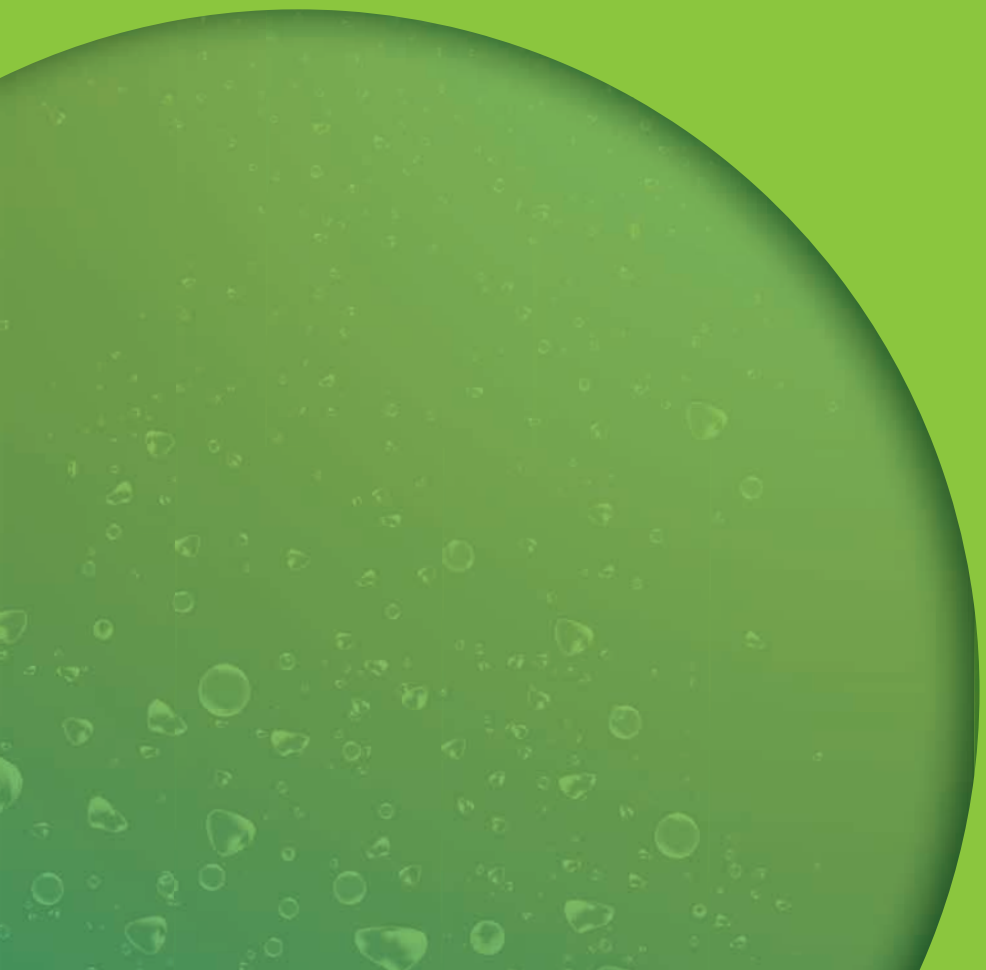

WATER PRETREATMENT

# Fine filter, backwashable

**Reliable protection in accordance with DIN/DVGW against coarse particles, suspended matter or other unresolved substances from the municipal water supply. Integrated filter cup made of impact-resistant, crystal-clear plastic, including pressure gauge and uninterrupted supply during backwashing.**

- Dezincification-resistant brass housing and screw connection
- Stainless steel filter unit 100 - 135 µm
- Pressure from 1.5 - 16 bar
- Maximum operating temperature of 40 °C
- For horizontal installation

| Fine filter | R ¾“ | R ¾“ | R 1“ | R 1 ¼“ | R 1 ½“ | R 2“ |
|---|---|---|---|---|---|---|
| **Type** | Rinsable | Backwashable | Backwashable | Backwashable | Backwashable | Backwashable |
| **Flow rate** ($m^3/h$ at $\Delta p = 0{,}5$ bar) | 3,2 | 5,5 | 7,5 | 8,9 | 15,6 | 16,5 |
| **Article no.** | **737722** | **727404** | **450017** | **450087** | **450088** | **725397** |

| Fine filter | DN 65 | DN 80 | DN 80 |
|---|---|---|---|
| **Flow rate** ($m^3/h$ at $\Delta p = 0{,}5$ bar) | 48 | 78 | 100 |
| **Article no.** | **734112** | **735707** | **735824** |



**Using water intelligently**
EnviroFALK GmbH | Gutenbergstrasse 7 | 56457 Westerburg | +49 2663 9908 0 | info@envirofalk.com | **envirofalk.com**